



Installation Guide for JARD Trigger System for Browning T-Bolt

Tools Needed:

- 3/32" Hex Key
- T15 Torx Screwdriver




3149 Nest Ave. – Sheldon, IA 51201
Phone: 712-324-7409
Email: support@jardinc – www.jardinc.com



Step 1:

With the rifle pointed in a safe direction, drop the magazine and visually inspect the chamber to ensure the rifle is safe and clear.

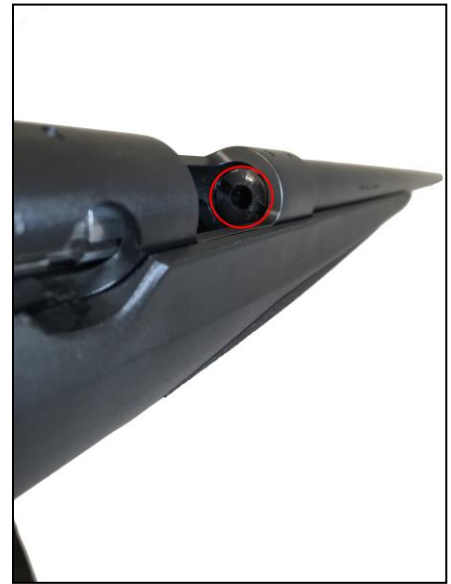

Step 2:

With the rifle now properly cleared, the bolt can safely be removed. First, unlatch the bolt but keep it all the way forward. Next, push the safety button rearward to the safe position. Finally, remove the bolt by compressing the bolt release button while working the bolt backward and out.





Step 3:

On the bottom side of the rifle, use a 3/32" hex key to remove the screws mounting the action to the stock then remove the action from the stock.



Step 4:

Locate and remove the mounting screw behind the trigger guard with a T15 torx screwdriver. Then rock the factory trigger housing backward and down to remove it.



Step 5:

To install your JARD Trigger System for Browning T-Bolt, perform steps 1-4 in reverse order. Once reassembled, perform function and safety checks. If any checks fail, review steps 1-4 to ensure no steps or details were missed. If all steps were completed correctly, refer to the Trigger Adjustment section of the JARD manual.

JARD, Inc.

3149 Nest Ave. – Sheldon, IA 51201

Phone: 712-324-7409 – Email: support@jardinc.com

www.jardinc.com